



# Terminal Blocks for Factory Automation

Amphenol Industrial




## Pluggable Terminal Blocks for PLCs

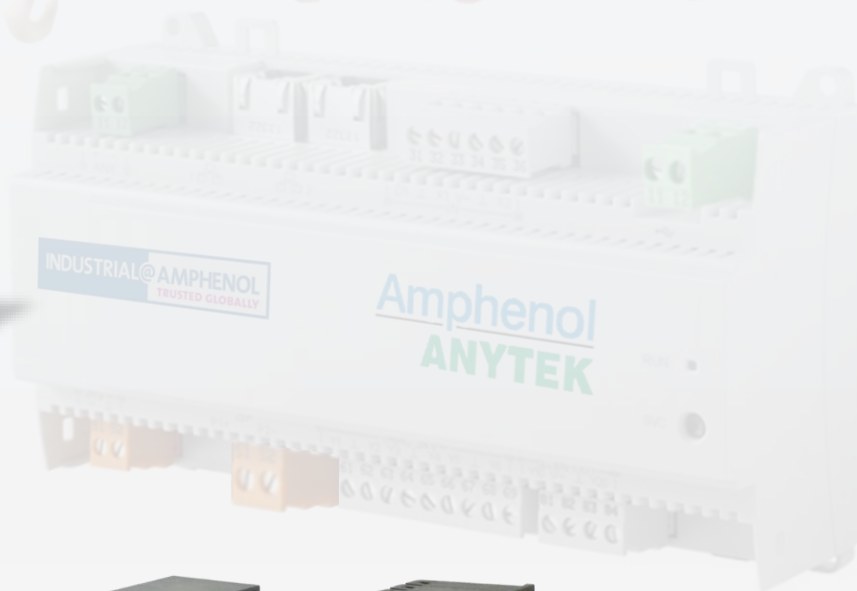

# Close Look at Anytek Pluggable Terminal Blocks

Amphenol Industrial


## Horizontal & Vertical Plugging

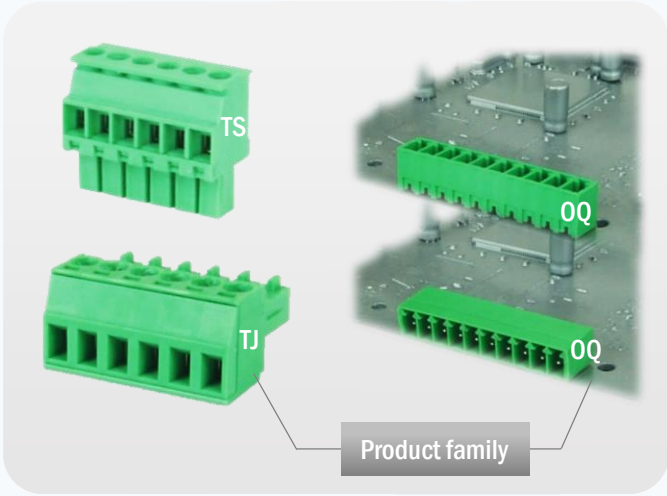


## Typical Specifications

|                 |                                                                                                                                                                                     |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Pole            | 2 - 24P                                                                                                                                                                             |
| Pitch           | 2,5 / 3,5 / 3,81 / 5,0 / 5,08 / 6,35 / 7,5 / 7,62 / 10,16 / 15,0mm                                                                                                                  |
| Rating          | 8-10A / 300V (3,5mm)<br>12-15A / 300V (5,0mm, 7,5mm)<br>55A / 300V (10,16mm)<br>115A / 600V (15,0mm)                                                                                |
| Wire Range      |  16 - 28 AWG (3,5mm)<br>12 - 24 AWG (5,0mm, 7,5mm)<br>6 - 20 AWG (10,16mm)<br>2 - 20 AWG (15,0mm) |
| Operating Temp. | -40 to +115°C                                                                                                                                                                       |
| Certification   | cULs                                                                                                                                                                                |
| Standard colors |                                                                                                  |



## Wire Fixation with Screw

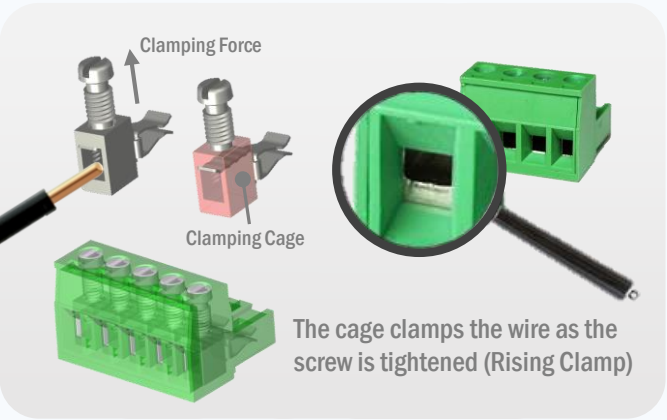

## Wire Fixation with Spring

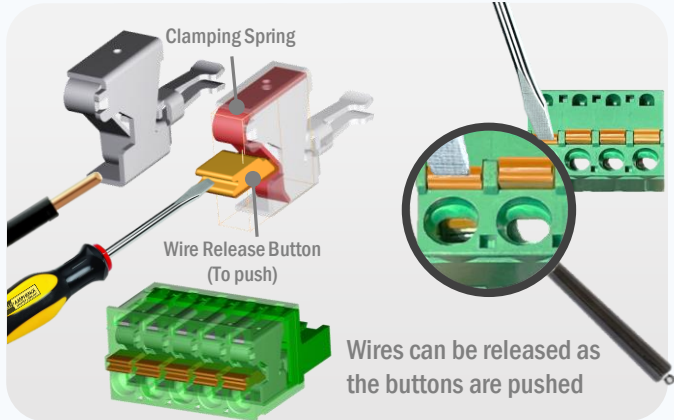

## Find the Best Fit for Your Application

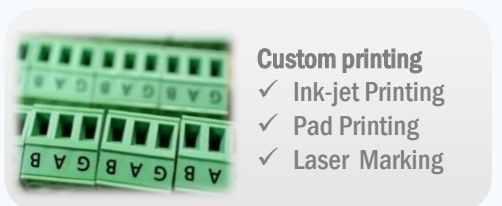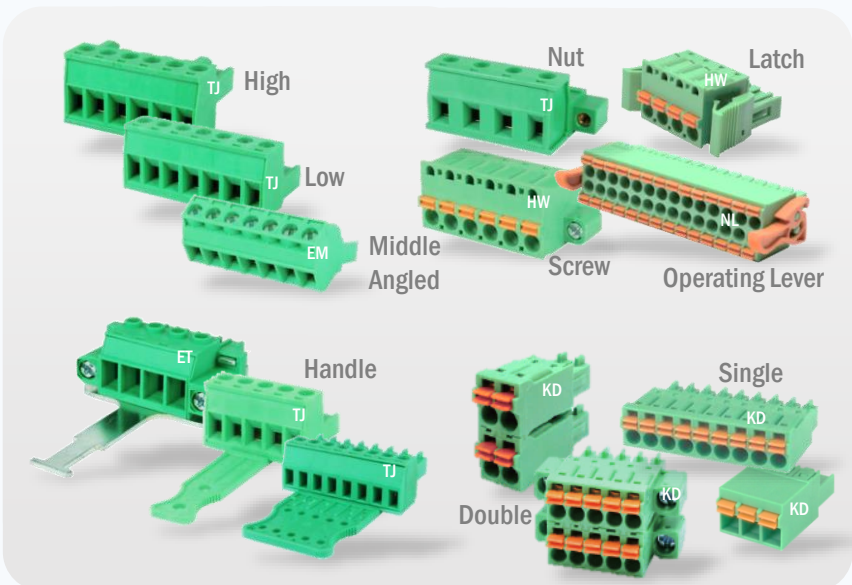



# Inelco Hunter Limited

Contact us for your terminal blocks

[sales@inelcohunter.co.uk](mailto:sales@inelcohunter.co.uk)

+44 (0)118 916 6928



Slim Design

N6



DIN RAIL

Safe Lever Action

NZ



EV Charger


Wire Detection

WQ



HVAC

Wide Range



Standard