


DETAIL A  
(SCALE 10: 1)



BACKLIGHT CIRCUIT DIAGRAM

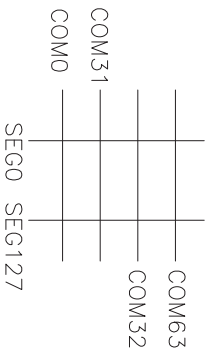

INELCO HUNTER LTD

DRAWN BY:	RTA	20181204	SCALE : 1/1	MODULE P/N:
CHECKED BY:			UNIT: mm	D/5767/DISP
APPROVED BY:				DESCRIPTION:
VERSION NO:	01			GRAPHIC MODULE

NO.	SYMBOL	PIN ASSIGNMENT
1	NC	NC
2	A	A
3	K	K
4	NC	NC
5	NC	NC
6	NC	NC
7	NC	NC
8	NC	NC
9	NC	NC
10	VG	VG
11	XVO	XVO
12	VO	VO
13	VSS	VSS
14	VDD	VDD
15	D7	D7
16	D6	D6
17	D5	D5
18	D4	D4
19	D3	D3
20	D2	D2
21	D1	D1
22	D0	D0
23	E	E
24	R/W	R/W
25	A0	A0
26	RSTB	RSTB
27	CS1B	CS1B

NOTES:

1. DISPLAY TYPE: FSTN, TRANSPARENT, POSITIVE.
2. VIEWING DIRECTION: 12:00 O'CLOCK.
3. OPERATING VOLTAGE: VDD=3.3V, VLCD=8.8V.
4. LCD DRIVE METHOD: 1/65DUTY, 1/9BIAS.
5. IC DRIVER: ST7567-G4.
6. OPERATING TEMP.: -30°C~80°C
7. STORAGE TEMP.: -30°C~80°C.
8. BACKLIGHT: 3-CHIP WHITE LED, If=15mA, Vf=9.6V.
9. GENERAL TOLERANCE: ±0.3MM.
10. ROHS COMPLIANT.

VER.	REVISED DESCRIPTION	RTA	2018.12.04
01	FIRST ISSUE		